



Specification for Approval

Customer: _____

Model Name: _____

| Supplier Approval | | | Customer approval |
|-------------------|-----------------|-------------|-------------------|
| R&D Designed | R&D Approved | QC Approved | |
| <i>Peter</i> | <i>Peng Jun</i> | | |

Table of Contents

| List | Description | Page No. |
|------|---|----------|
| | Cover | 1 |
| | Revision Record | 2 |
| | Table of Contents | 3 |
| 1 | Scope | 4 |
| 2 | General Information | 4 |
| 3 | External Dimensions | 5 |
| 4 | Interface Description | 6 |
| 5 | Absolute Maximum Ratings | 8 |
| 6 | DC Characteristics | 8 |
| 7 | Timing Characteristics | 9 |
| 8 | Backlight Characteristics | 12 |
| 9 | Optical Characteristics | 13 |
| 10 | Reliability Test Conditions And Methods | 15 |
| 11 | Inspection Standard | 16 |
| 12 | Handling Precautions | 21 |
| 13 | Precaution for Use | 22 |
| 14 | Packing Method | 23 |
| 15 | Lot Mark | 24 |

1. Scope

This specification defines general provisions as well as inspection standards for TFT module supplied by AMSON electronics.

If the event of unforeseen problem or unspecified items may occur, naturally shall negotiate and agree to solution

2. General Information

| TITEM | STANDARD VALUES | UNITS |
|--------------------------------|---------------------------|-------|
| LCD type | 7.0" TFT | -- |
| Dot arrangement | 800(RGB)×480 | dots |
| Color filter array | RGB vertical stripe | -- |
| Display mode | Normally White | - |
| Gray Scale Inversion Direction | 6 o'clock | -- |
| Eyes Viewing Direction | 50/70/70/70 | |
| Module size | 165.0(W)×104.44(H)×5.2(T) | mm |
| Active area | 152.4 (W)×91.44(H) | mm |
| Dot pitch | 190.5(W)×190.5(H) | um |
| Interface | RGB 18bit | -- |
| Operating temperature | -20 ~ +70 | °C |
| Storage temperature | -30 ~ +80 | °C |

4. Interface Description


| PIN | PIN NAME | DESCRIPTION |
|-----|----------|--|
| 1 | VLED | LED backlight (Anode). |
| 2 | VLED | |
| 3 | BL-ADJ | Adjust the led brightness with PWM Pulse |
| 4 | LED-GND | LED backlight (Cathode). |
| 5 | LED-GND | |
| 6 | VCC | Digital Power. |
| 7 | VCC | |
| 8 | MODE | DE/SYNC mode select. Normally pull high. H: DE mode. L: HSD/VSD mode. |
| 9 | DE | Data Enable signal. |
| 10 | VS | Vertical sync input. Negative polarity. |
| 11 | HS | Horizontal sync input. Negative polarity. |
| 12 | GND | Power ground |
| 13 | B5 | Blue Data Input. |
| 14 | B4 | Blue Data Input. |
| 15 | B3 | Blue Data Input. |
| 16 | GND | Power ground |
| 17 | B2 | Blue Data Input. |
| 18 | B1 | Blue Data Input. |
| 19 | B0 | Blue Data Input |
| 20 | GND | Power ground |
| 21 | G5 | Green Data Input. |
| 22 | G4 | Green Data Input. |
| 23 | G3 | Green Data Input. |
| 24 | GND | Power ground |
| 25 | G2 | Green Data Input. |
| 26 | G1 | Green Data Input. |
| 27 | G0 | Green Data Input |
| 28 | GND | Power ground |
| 29 | R5 | Red Data Input. |
| 30 | R4 | Red Data Input. |
| 31 | R3 | Red Data Input. |
| 32 | GND | Power ground |
| 33 | R2 | Red Data Input. |
| 34 | R1 | Red Data Input. |
| 35 | R0 | Red Data Input |
| 36 | GND | Power ground. |
| 37 | DCLK | Clock input. |
| 38 | GND | Power ground. |
| 39 | L/R | Left or Right Display Control. |
| 40 | U/D | Up / Down Display Control. |

Note:

- 1. L/R: left or right setting
U/D: up or down setting

| L/R | U/D | Data shifting |
|-----|-----|----------------------------------|
| VCC | GND | Left → Right, Up → Down(default) |
| GND | GND | Right → Left, Up → Down |
| VCC | VCC | Left → Right, Down → Up |
| GND | VCC | Right → Left, Down → Up |

Definition of scanning direction:

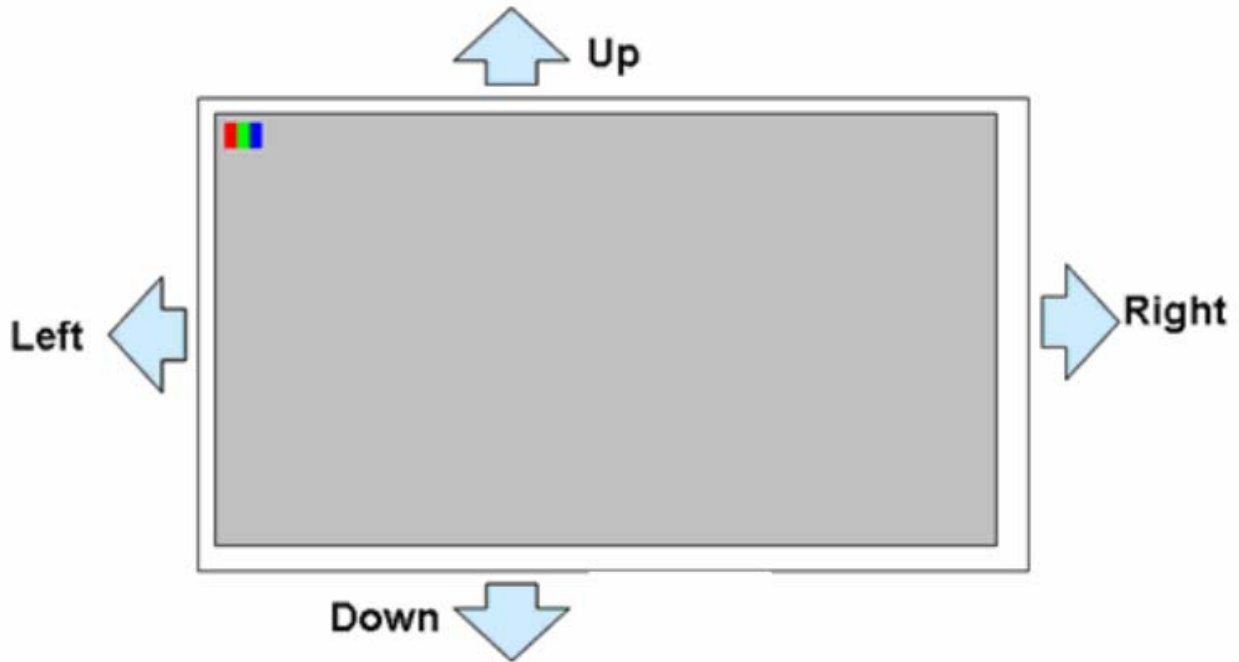

5. Absolute Maximum Ratings

| Item | Symbol | Min. | Max. | Unit |
|-----------------------|--------|------|------|------|
| Supply Voltage | VCC | -0.5 | 5 | V |
| VIN Voltage | VLED | - | 5.5 | V |
| Operating Temperature | TOP | -20 | 70 | °C |
| Storage Temperature | TST | -30 | 80 | °C |

6. DC Characteristics

| Item | Symbol | Min. | Typ. | Max. | Unit | Remark |
|--------------------------|------------------|---------|------|---------|------|-----------|
| Power Voltage | VCC | 3.0 | 3.3 | 3.6 | V | |
| Power Voltage | VLED | 4.5 | 5.0 | 5.5 | V | |
| Input logic high voltage | V _{IH} | 0.7*VCC | - | VCC | V | |
| Input logic low voltage | V _{IL} | GND | - | 0.3*VCC | V | |
| Current for Power | I _{CC} | - | 210 | 350 | mA | VCC=3.3V |
| Current for Power | I _{LED} | - | 500 | 800 | mA | VLED=5.0V |

7. Timing Characteristics

7.1 DC Characteristics

| Parameter | Symbol | Condition | Rating | | | Unit | Application pin |
|----------------------------|-----------|------------------------------|---------|------|--------|------------|---------------------|
| | | | Min. | Typ. | Max. | | |
| Input H voltage | V_{IH} | - | 0.7VCC | - | VCC | V | All input |
| Input L voltage | V_{IL} | - | 0 | - | 0.3VCC | V | All input |
| Output H voltage | V_{OH} | $I_{OH}=200\mu A$ | VCC-0.3 | - | VCC | V | STVU,D |
| Output L voltage | V_{OL} | $I_{OL}=200\mu A$ | 0 | - | 0.3 | V | STVU,D |
| Output H resistance | R_{OH} | $V_x = V_{GH} - 0.5V$ | - | - | 1000 | Ω | OUT[1] ~ OUT[960] |
| Output L resistance | R_{OL} | $V_x = V_{GL} + 0.5V$ | - | - | 1000 | Ω | OUT[1] ~ OUT[960] |
| Input leakage current | I_{IN} | - | -1.0 | - | +1.0 | μA | Note ⁽²⁾ |
| Pull high / low resistance | R_{PHL} | $V_{IN}=GND$ $V_{IN}=VCC$ | 70 | 200 | 400 | k Ω | XON, SEL, MODE |
| VGH Power consumption | I_{VGH} | Note ⁽¹⁾ | - | - | 200 | μA | - |
| VGL Power consumption | I_{VGH} | Note ⁽¹⁾ | - | - | -200 | μA | - |
| VCC Power consumption | I_{VCC} | Note ⁽¹⁾ | - | - | 150 | μA | - |

Note 1: Power consumption with the following condition: Output no load, $V_{GH}=25V$, $V_{GL}=-15V$, $VCC=3.3V$, $V_{IH}=VCC$, $V_{IL}=VGND$, $F_{CKV} = 60 KHz$, $OE = V_{IL}$, $XON=V_{IH}$.


Note 2: All input except XON, SEL, MODE

7.2 AC Characteristics

| Parameter | Symbol | Condition | Rating | | | Unit |
|-------------------------------|----------------------|----------------|--------|------|------|---------|
| | | | Min. | Typ. | Max. | |
| CKV period | t_{CKV} | - | 5 | - | - | μs |
| CKV pulse width | t_{CKVH}, t_{CKVL} | 50% duty cycle | 2.5 | - | - | μs |
| OE pulse width | $t_{W_{OE}}$ | - | 1 | - | - | μs |
| XON pulse width | $t_{W_{XAO}}$ | - | 100 | - | - | μs |
| Data setup time | t_{SU} | - | 0.2 | - | - | μs |
| Data hold time | t_{HD} | - | 0.3 | - | - | μs |
| CKV to output delay time | t_{PD1} | CL=200pF | - | - | 0.9 | μs |
| Start pulse output delay time | t_{PD2} | CL=20pF | - | - | 0.5 | μs |
| OE to output delay time | t_{PD3} | CL=200pF | - | - | 0.9 | μs |
| XON to output delay time | t_{PD4} | CL=200pF | - | - | 100 | μs |

Note 1: The measurement point for all of above signals is at 50% of input/output amplitude.

7.3 INPUT SIGNAL TIMING

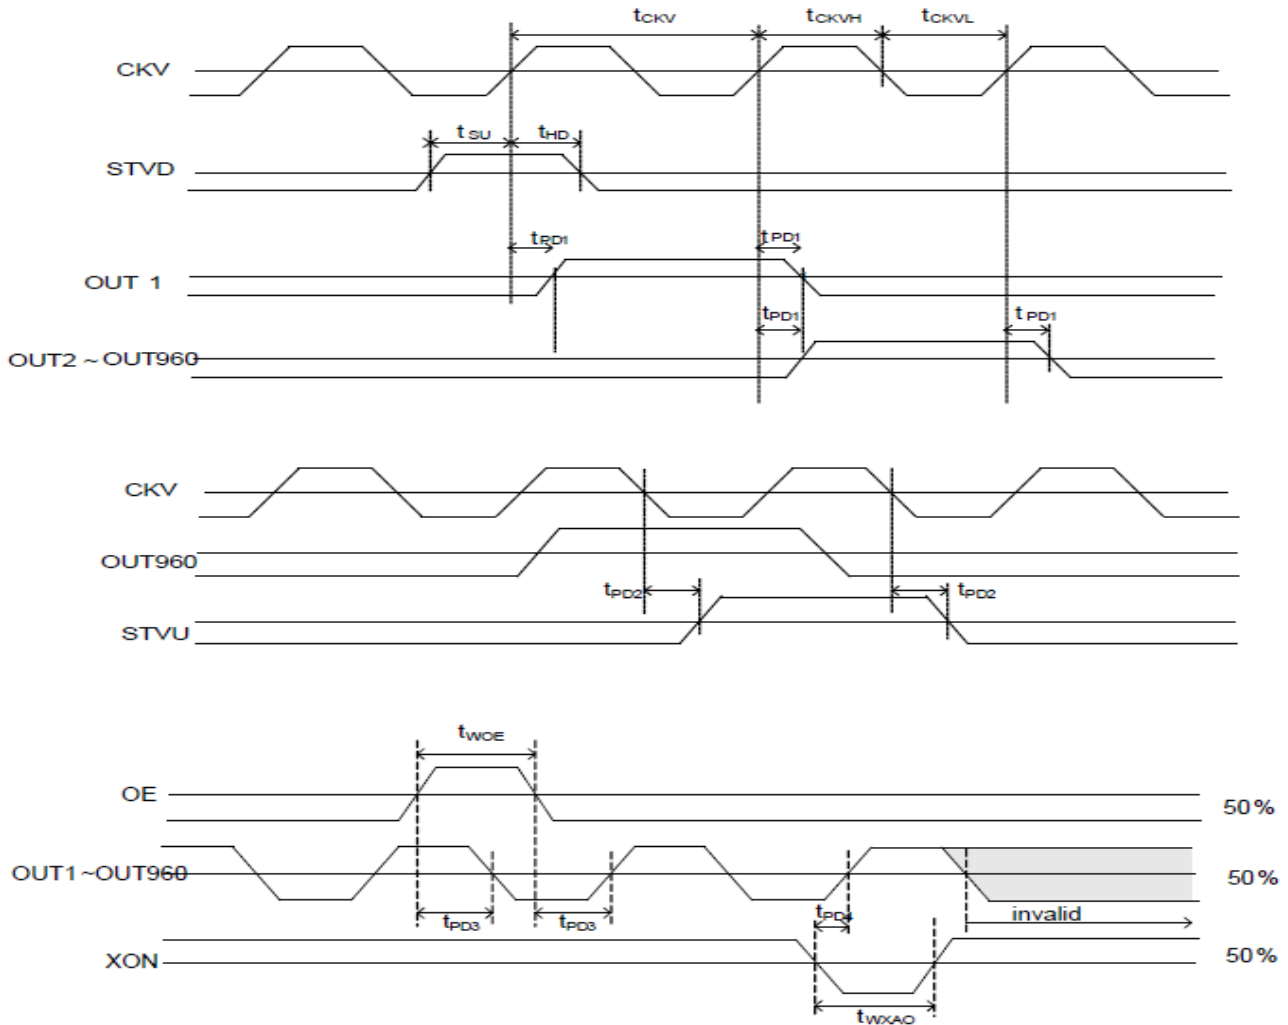

7.4 Data Timing

| Item | Symbol | Values | | | Unit |
|-------------------------|--------|--------|------|------|------|
| | | Min. | Typ. | Max. | |
| Horizontal Display Area | thd | - | 800 | - | DCLK |
| DCLK Frequency | fclk | 26.4 | 33.3 | 46.8 | MHz |
| One Horizontal Line | th | 862 | 1056 | 1200 | DCLK |
| HS pulse width | thpw | 1 | - | 40 | DCLK |
| HS Blanking | thb | 46 | 46 | 46 | DCLK |
| HS Front Porch | thfp | 16 | 210 | 354 | DCLK |

| Item | Symbol | Values | | | Unit |
|-----------------------|--------|--------|------|------|------|
| | | Min. | Typ. | Max. | |
| Vertical Display Area | tvd | - | 480 | - | TH |
| VS period time | tv | 510 | 525 | 650 | TH |
| VS pulse width | tvpw | 1 | - | 20 | TH |
| VS Blanking | tvb | 23 | 23 | 23 | TH |
| VS Front Porch | tvfp | 7 | 22 | 147 | TH |


Note: Frame rate is 60±5Hz

7.5 Data Input Format

Horizontal input timing diagram



Vertical input timing diagram

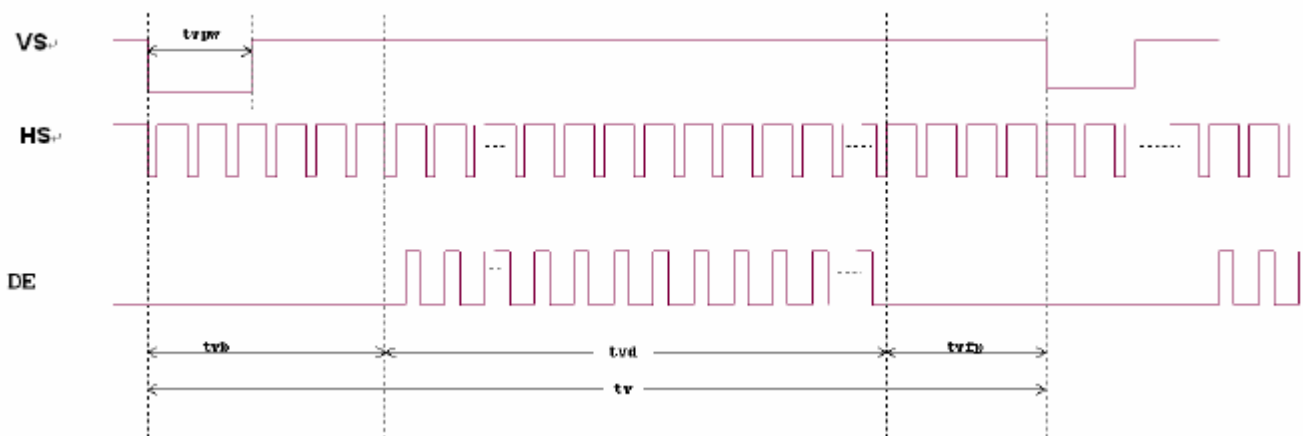


8. Backlight Characteristic

| Item | Symbol | MIN | TYP | MAX | UNIT | Test Condition |
|----------------------------|------------------|-------|-----|------|-------------------|----------------|
| Supply Voltage | VLED | 4.5 | 5.0 | 5.5 | V | |
| Supply Current | ILED | - | 500 | 800 | mA | VLED=5.0V |
| Luminous Intensity for LCM | - | 450 | 550 | - | cd/m ² | |
| Uniformity for LCM | - | 75 | 80 | - | % | |
| Life Time | - | 50000 | - | - | Hr | |
| PWM Dimming Frequency | f _{PWM} | 5 | | 100k | Hz | |
| Backlight Color | White | | | | | |


9. Optical Characteristics

| Item | Conditions | Min. | Typ. | Max. | Unit | Note | |
|------------------------------------|------------|---------------|------|---------------|------|-------------|-------------|
| Viewing Angle (CR>10) | Horizontal | θ_L | 60 | 70 | - | degree | (1),(2),(6) |
| | | θ_R | 60 | 70 | - | | |
| | Vertical | θ_T | 50 | 60 | - | | |
| | | θ_B | 60 | 70 | - | | |
| Contrast Ratio | Center | 700 | 1000 | - | - | (1),(3),(6) | |
| Response Time | Rising | - | 5 | 10 | ms | (1),(4),(6) | |
| | Falling | - | 15 | 20 | | | |
| CF Color Chromaticity (CIE1931) | Red x | Typ. -0.05 | 0.58 | Typ. +0.05 | - | (1), (6) | |
| | Red y | | 0.35 | | - | | |
| | Green x | | 0.35 | | - | | |
| | Green y | | 0.59 | | - | | |
| | Blue x | | 0.15 | | - | | |
| | Blue y | | 0.07 | | - | | |
| | White x | | 0.30 | | - | | |
| | White y | | 0.31 | | - | | |

Note (1) Measurement Setup: The LCD module should be stabilized at given temp. 25°C for 15 minutes to avoid abrupt temperature change during measuring. In order to stabilize the luminance, the measurement should be executed after lighting backlight for 15 minutes in a windless room.

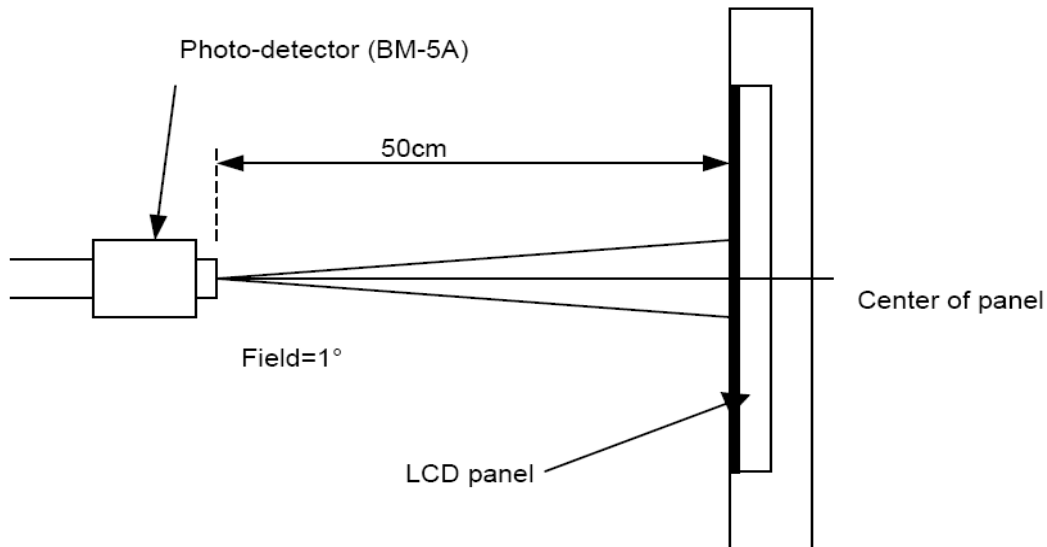

Note (2) Definition of Viewing Angle

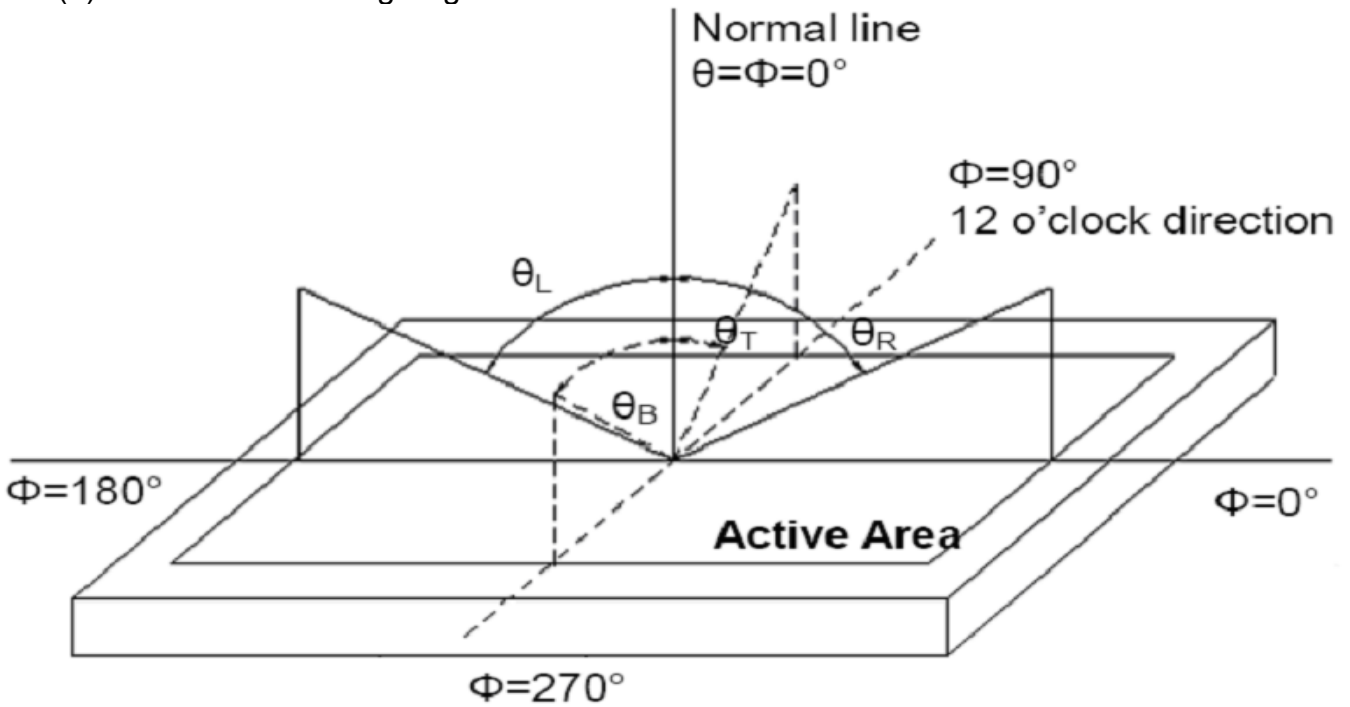


Note (3) Definition of Contrast Ratio (CR)

The contrast ratio can be calculated by the following expression

$$\text{Contrast Ratio (CR)} = L_{63} / L_0$$

L63: Luminance of gray level 63, L0: Luminance of gray level 0

Note (4) Definition of response time

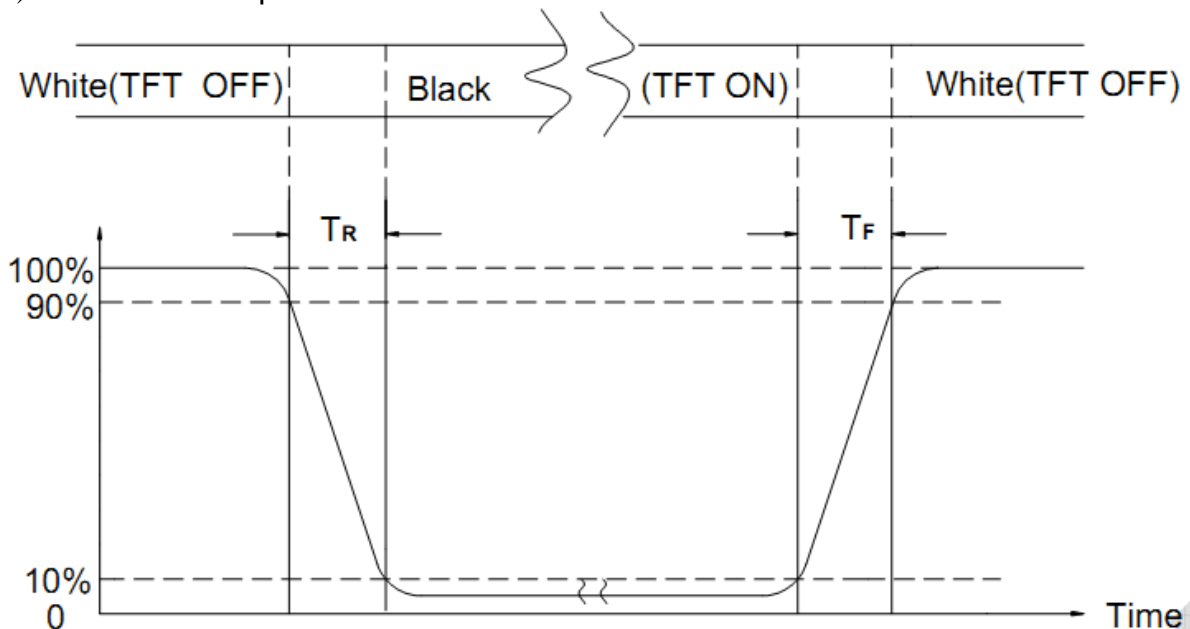

Note (5) Definition of Transmittance (Module is without signal input)

$$\text{Transmittance} = \text{Center Luminance of LCD} / \text{Center Luminance of Back Light} \times 100\%$$

Note (6) Definition of color chromaticity (CIE1931)

Color coordinates measured at the center point of LCD

10. Reliability Test Conditions and Methods

| NO. | Test Items | Test Condition | |
|-----|---|--|---|
| ① | High Temperature Storage | Keep in $80^{\circ}\text{C} \pm 2^{\circ}\text{C} \times 240\text{Hrs}$ Surrounding temperature, then storage at normal condition 4hrs. | |
| ② | Low Temperature Storage | Keep in $-30^{\circ}\text{C} \pm 2^{\circ}\text{C} \times 240\text{Hrs}$ Surrounding temperature, then storage at normal condition 4hrs. | |
| ③ | High Temperature Operating Test | $70^{\circ}\text{C} \pm 2^{\circ}\text{C} \times 240\text{Hrs}$ | |
| ④ | Low Temperature Operating Test | $-20^{\circ}\text{C} \pm 2^{\circ}\text{C} \times 240\text{Hrs}$ | |
| ⑤ | High Temperature / High Humidity Storage Test | Keep in $60^{\circ}\text{C} \pm 5^{\circ}\text{C} \times 90\%\text{RH} \times 240\text{Hrs}$ Surrounding temperature, then storage at normal condition 4hrs. | |
| ⑥ | Temperature Cycling Storage Test | $ \begin{array}{ccccccc} -30^{\circ}\text{C} & \rightarrow & +25^{\circ}\text{C} & \rightarrow & 80^{\circ}\text{C} & \rightarrow & +25^{\circ}\text{C} \\ (30\text{mins}) & & (5\text{mins}) & & (30\text{mins}) & & (5\text{mins}) \\ \leftarrow & & & & & & \rightarrow \\ & & & & 30 \text{ Cycle} & & \end{array} $ Surrounding temperature, then storage at normal condition 4hrs. | |
| ⑦ | ESD Test | Air Discharge: Apply 6 KV with 5 times Discharge for each polarity +/- | Contact Discharge: Apply 250 V with 5 times discharge for each polarity +/- |
| | | 1. Temperature ambience : $15^{\circ}\text{C} \sim 35^{\circ}\text{C}$ 2. Humidity relative : 30%~60% 3. Energy Storage Capacitance (Cs + Cd): $150\text{pF} \pm 10\%$ 4. Discharge Resistance (Rd): $330\Omega \pm 10\%$ 5. Discharge, mode of operation: Single Discharge (time between successive discharges at least 1 sec) (Tolerance if the output voltage indication : $\pm 5\%$) | |
| ⑧ | Vibration Test (Packaged) | 1. Sine wave 10~55 Hz frequency (1 min/sweep) 2. The amplitude of vibration : 1.5 mm 3. Each direction (X、Y、Z) duration for 2Hrs | |
| ⑨ | Drop Test (Packaged) | Drop Direction: ※1 corner / 3 edges / 6 sides each 1time Height: 45cm | |

11. Inspection Standard

11.1. Quality

The quality of goods supplied to purchaser shall come up to the following standards:

11.1.1. Inspection Tools and Instruments

Vernier calipers, film scales, multimeter, magnifying eyepiece, ND5%, luminance meter and so on.

11.1.2. The Method of Preserving Goods

After delivery of goods from AMSON to purchaser, purchaser shall keep the LCM at -10°C to 30°C, and it might be desirable to keep at the normal room temperature and humidity until incoming inspection or throwing into process line.

11.1.3. Incoming Inspection

(A) The methods of Inspection

If purchaser makes an incoming inspection, a sampling plan shall be applied on the condition that quality of one delivery shall be regarded as one lot.

(B) The standard of quality:

ISO-2859-1 (same as MIL-STD-105E), Level: II

| CLASS | AQL (%) |
|----------|---------|
| Critical | 0.4 % |
| Major | 0.65 % |
| Minor | 1.5 % |

Every item shall be inspected according to the class.

(C) Measure

If as the result of above receiving inspection, a lot out is discovered, purchaser Shall inform seller of it within seven days. But first shipment within fourteen days.

11.1.4. Warranty Policy

AMSON will provide one-year warranty for the products only if under Specification operating conditions. AMSON will replace new products for these defect products which are under warranty period and belong to the responsibility of AMSON.

11.2. Checking Condition

11.2.1 Checking direction shall be in the 45 degree area to face the sample.


11.2.2 Inspector shall see from over 300±25mm with bare eyes far from the sample.

11.2.3 Ambient Illumination:

0 ~30 Lux for functional inspection

500 ~ 1200 Lux for external appearance inspection.

11.2.4 Test Area:

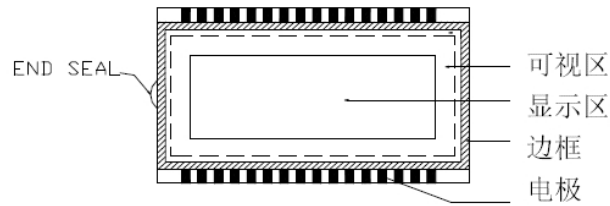

11.2.5 Inspection should be carried out with rope electrostatic ring and static finger cover (both hands except small fingers must be worn)

11.2.6 The inspector may make a visual inspection or a comparative examination with a film ruler and a magnifying eyepiece. Individual defects shall be determined according to the limited samples.


11.2.7 Functional testing uses electrical testing fixtures or test fixtures required by customers.

11.2.8 The ion fan should be used when testing.


11.2.9 The principle of judgement:

11.2.9.1 If the defect outside the visual area does not affect the assembly and display, it will be judged as a good product.

11.2.9.2 Poor definition:
Pixel:
 A combination of three sub-pixels
 (Red + Green + Blue).



Dot:
 Any of the sub-pixels
 (Red or Green or Blue).

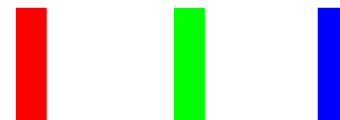

Bright and dark dots:
 A point pixel (sub-pixel: R, G, B pixels) is lit or turned off during the display function test.


Highlights:
 Usually considered to be shown on a black screen.








Dark spots:
 They are generally considered to be shown on R, G, B solid colors or white images.

Neighborhood:
 Two or three adjacent point pixels (dot: sub-pixel) connected together (R, G or G, B or B, R or RGB).

11.3 / 11.4 / 11.5 Inspection Plans:

| CLASS | ITEM | JUDGEMENT | CLASS |
|--------------------|---|--|----------|
| PACKING & INDICATE | 1. OUTSIDE AND INSIDE PACKAGE | "MODEL NO." , "LOT NO." AND "QUANTITY" SHOULD INDICATE ON THE PACKAGE. | Minor |
| | 2. MODEL MIXED AND QUANTITY | OTHER MODEL MIXED.....REJECTED QUANTITY SHORT OR OVER.....REJECTED | Critical |
| | 3. PRODUCT INDICATION | "MODEL NO." SHOULD INDICATE ON THE PRODUCT | Major |
| ASSEMBLY | 4. DIMENSION, LCD GLASS SCRATCH AND SCRIBE DEFECT. | ACCORDING TO SPECIFICATION OR DRAWING. | Major |
| APPEARANCE | 5. VIEWING AREA | POLARIZER EDGE OR LCD'S SEALING LINE IS VISABLE IN THE VIEWING AREAREJECTED | Minor |
| | 6. BLEMISH · BLACK SPOT · WHITE SPOT IN THE LCD AND LCD GLASS CRACKS | ACCORDING TO STANDARD OF VISUAL INSPECTION(INSIDE VIEWING AREA) | Minor |
| | 7. BLEMISH · BLACK SPOT WHITE SPOT AND SCRATCH ON THE POLARIZER | ACCORDING TO STANDARD OF VISUAL INSPECTION(INSIDE VIEWING AREA) | Minor |
| | 8. BUBBLE IN POLARIZER | ACCORDING TO STANDARD OF VISUAL INSPECTION(INSIDE VIEWING AREA) | Minor |
| | 9. LCD'S RAINBOW COLOR | STRONG DEVIATION COLOR (OR NEWTON RING) OF LCD.....REJECTED. OR ACCORDING TO LIMITED SAMPLE (IF NEEDED, AND INSIDE VIEWING AREA) | Minor |
| ELECTRICAL | 10. ELECTRICAL AND OPTICAL CHARACTERISTICS (CONTRAST· VOP · CHROMATICITY ... ETC) | ACCORDING TO SPECIFICATION OR DRAWING . (INSIDE VIEWING AREA) | Critical |
| | 11.MISSING LINE | MISSING DOT · LINE · CHARACTERREJECTED | Critical |
| | 12.SHORT CIRCUIT· WRONG PATTERN DISPLAY | NO DISPLAY · WRONG PATTERN DISPLAY · CURRENT CONSUMPTION OUT OF SPECIFICATION..... REJECTED | Critical |
| | 13. DOT DEFECT (FOR COLOR AND TFT) | ACCORDING TO STANDARD OF VISUAL INSPECTION | Minor |

| NO. | CLASS | ITEM | JUDGEMENT | | |
|----------|-------|--|--|----------------------------------|--------------------------|
| 11.4.1 | MINOR | BLACK AND WHITE SPOT FOREIGN MATERIEL DUST IN THE CELL BLEMISH SCRATCH | (A) ROUND TYPE: unit: mm | | |
| | | | DIAMETER (mm.) | ACCEPTABLE Q'TY | |
| | | | $\varnothing \leq 0.1$ | Disregard | |
| | | | $0.1 < \varnothing \leq 0.25$ | 3 (Distance \geq 5mm) | |
| | | | $0.25 < \varnothing$ | 0 | |
| | | | NOTE: $\varnothing = (\text{LENGTH} * \text{WIDTH}) / 2$ | | |
| 11.4.2 | MINOR | BUBBLE IN POLARIZER DENT ON POLARIZER | (S) ROUND TYPE: unit: mm | | |
| | | | LENGTH | WIDTH | ACCEPTABLE QTY |
| | | | | $W \leq 0.03$ | Disregard |
| | | | $L \leq 5.0$ | $0.03 < W \leq 0.07$ | 3 (Distanced \geq 5mm) |
| | | | | $0.07 < W$ | FOLLOW ROUND TYPE |
| | | | NOTE: $\varnothing = (\text{LENGTH} * \text{WIDTH}) / 2$ | | |
| 11.4.3 | MINOR | Dot Defect | Items | ACC. Q'TY | |
| | | | Bright dot | $N \leq 4$ (Distance \geq 5mm) | |
| | | | Dark dot | $N \leq 4$ (Distance \geq 5mm) | |
| | | | Pixel Define : | | |
| | |  | | | |
| | | <p>Note:</p> <ol style="list-style-type: none"> The definition of dot: The size of a defective dot over 1 of whole dot is regarded as one defective dot. Definition: $< 1/2$ dot and visible by 5% ND filter Bright dot: Dots appear bright and unchanged in size m which LCD panel is displaying under black pattern. Dark dot: Dots appear dark and unchanged in size in which LCD panel is displaying under pure Red, Green, Blue pattern. | | | |
| 11.4.3.1 | MINOR | Mura | Not visible through 5% ND filter in 50% gray or judge by limit sample if necessary | | |
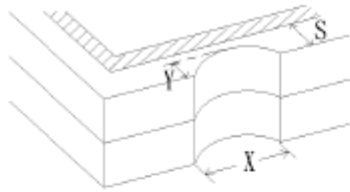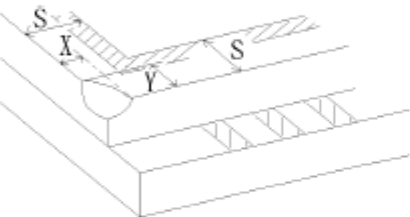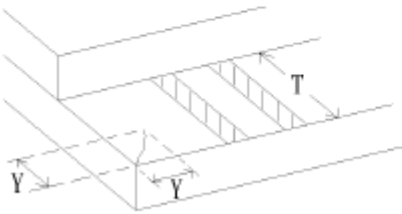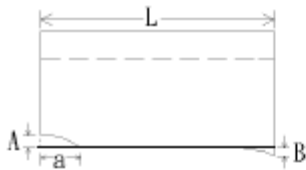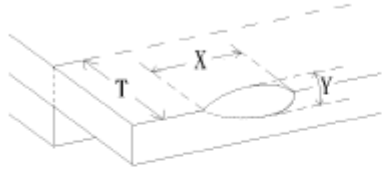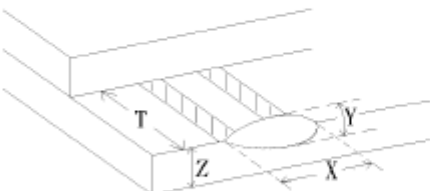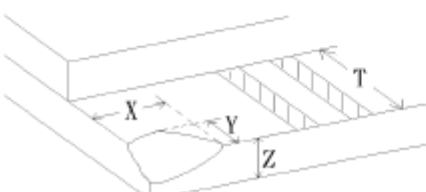
| NO. | CLASS | ITEM | JUDGEMENT |
|---------|-------|--|--|
| 11.4.4 | MINOR | LCD GLASS CHIPPING |  $Y > S$ Reject |
| 11.4.5 | MINOR | LCD GLASS CHIPPING |  $X \text{ or } Y > S$ Reject |
| 11.4.6 | MAJOR | LCD GLASS GLASS CRACK |  $Y > (1/2) T$ Reject |
| 11.4.7 | MAJOR | LCD GLASS SCRIBE DEFECT |  <ol style="list-style-type: none"> $a > L/3$, $A > 1.5\text{mm}$. Reject B : ACCORDING TO DIMENSION |
| 11.4.8 | MINOR | LCD GLASS CHIPPING (ON THE TERMINAL AREA) |  $\Phi = (x+y)/2 > 2.5 \text{ mm}$ Reject |
| 11.4.9 | MINOR | LCD GLASS CHIPPING (ON THE TERMINAL SURFACE) |  $Y > (1/3) T$ Reject |
| 11.4.10 | MINOR | LCD GLASS CHIPPING |  $Y > T$ Reject |

12. Handling Precautions

12.1 Mounting method

The LCD panel of AMSON TFT module consists of two thin glass plates with polarizers which easily be damaged. And since the module is so constructed as to be fixed by utilizing fitting holes in the printed circuit board.

Extreme care should be needed when handling the LCD modules.

12.2 Caution of LCD handling and cleaning

When cleaning the display surface, Use soft cloth with solvent

[Recommended below] and wipe lightly

- Isopropyl alcohol
- Ethyl alcohol

Do not wipe the display surface with dry or hard materials that will damage the polarizer surface.

Do not use the following solvent:

- Water
- Aromatics

Do not wipe ITO pad area with the dry or hard materials that will damage the ITO patterns

Do not use the following solvent on the pad or prevent it from being contaminated:

- Soldering flux
- Chlorine (Cl) , Sulfur (S)

If goods were sent without being silicon coated on the pad, ITO patterns could be damaged due to the corrosion as time goes on.

If ITO corrosion happens by miss-handling or using some materials such as Chlorine (Cl), Sulfur (S) from customer, Responsibility is on customer.

12.3 Caution against static charge

The LCD module uses C-MOS LSI drivers, so we recommend that you:

Connect any unused input terminal to power or ground, do not input any signals before power is turned on, and ground your body, work/assembly areas, and assembly equipment to protect against static electricity.

12.4 packing

- Module employs LCD elements and must be treated as such.
- Avoid intense shock and falls from a height.
- To prevent modules from degradation, do not operate or store them exposed direct to sunshine or high temperature/humidity

12.5 Caution for operation

- It is an indispensable condition to drive LCD's within the specified voltage limit since the higher voltage than the limit causes the shorter LCD life.
- An electrochemical reaction due to direct current causes LCD's undesirable deterioration, so that the use of direct current drive should be avoided.
- Response time will be extremely delayed at lower temperature than the operating temperature range and on the other hand at higher temperature LCD's show dark color in them. However those phenomena do not mean malfunction or out of order with LCD's, which will come back in the specified operation temperature.
- If the display area is pushed hard during operation, some font will be abnormally displayed but it resumes normal condition after turning off once.
- Slight dew depositing on terminals is a cause for electro-chemical reaction resulting in terminal open circuit.

Usage under the maximum operating temperature, 50%Rh or less is required.

12.6 storing

In the case of storing for a long period of time for instance, for years for the purpose or replacement use, the following ways are recommended.

- Storage in a polyethylene bag with the opening sealed so as not to enter fresh air outside in it . And with no desiccant.
- Placing in a dark place where neither exposure to direct sunlight nor light's keeping the storage temperature range.
- Storing with no touch on polarizer surface by the anything else.
[It is recommended to store them as they have been contained in the inner container at the time of delivery from us

12.7 Safety

- It is recommendable to crash damaged or unnecessary LCD's into pieces and wash off liquid crystal by either of solvents such as acetone and ethanol, which should be burned up later.
- When any liquid leaked out of a damaged glass cell comes in contact with your hands, please wash it off well with soap and water

13. Precaution for Use

13.1


A limit sample should be provided by the both parties on an occasion when the both parties agreed its necessity. Judgment by a limit sample shall take effect after the limit sample has been established and confirmed by the both parties.

13.2

On the following occasions, the handing of problem should be decided through discussion and agreement between responsible of the both parties.

- When a question is arisen in this specification.
- When a new problem is arisen which is not specified in this specifications?
- When an inspection specifications change or operating condition change in customer is reported to AMSON TFT and some problem is arisen in this specification due to the change.
- When a new problem is arisen at the customer's operating set for sample evaluation in the customer site.

14. Packing Method

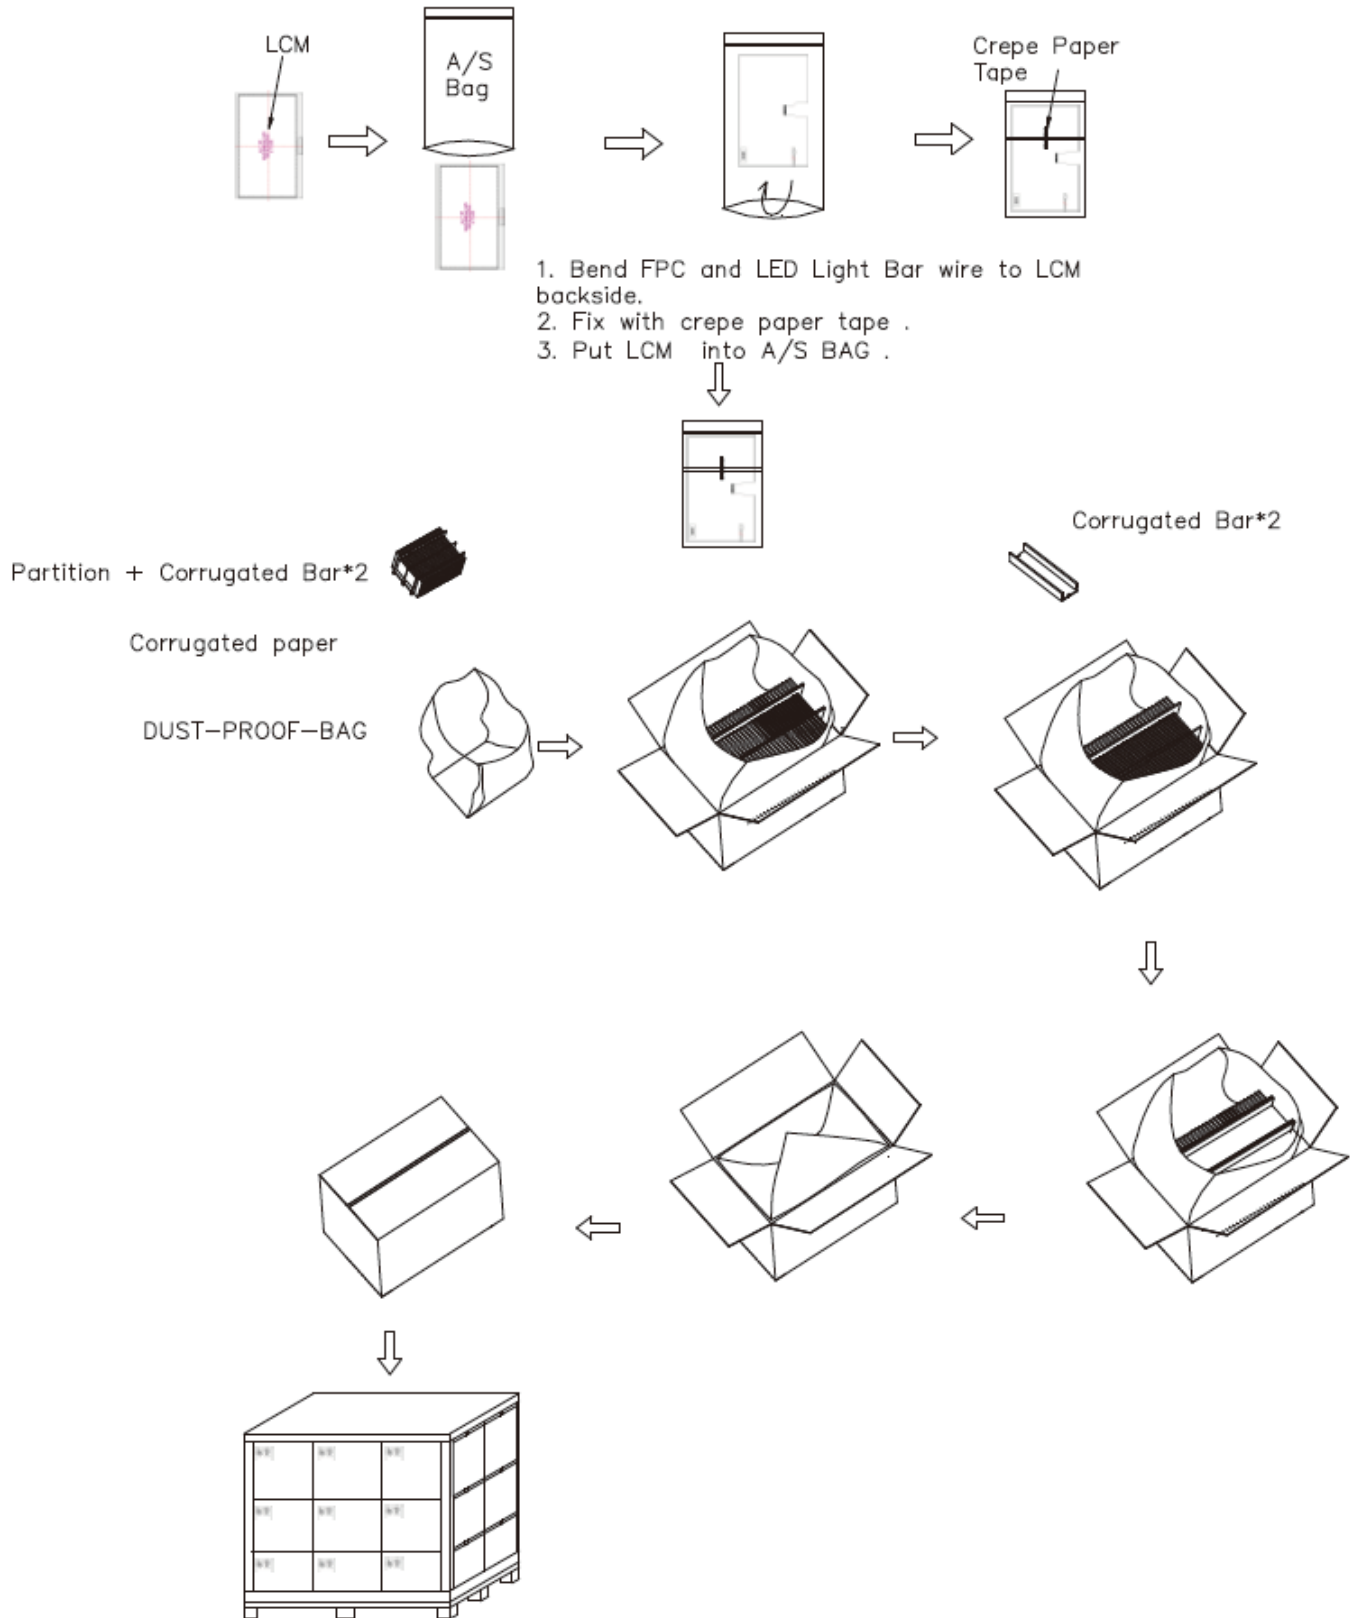

15. Lot Mark

15.1 Lot Mark

| | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 |
|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|

Code 1, 2, 3, 4, 5, 6: AMSON model code.

Code 7, 8: production year.

Code 9, 10: production month.

Code 11, 12, 13, 14, 15: serial number.

15.2 Location of Lot Mark

The label is attached to the backside of the TFT LCD display module.

